

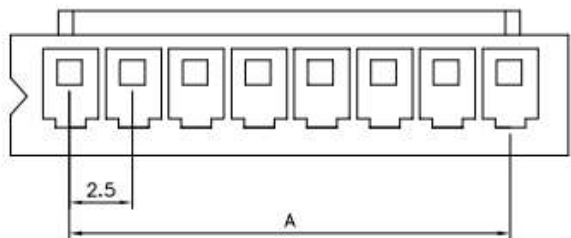


**△ SPECIFICATION**


Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC/DC  
 Temperature Range: -25°C~+85°C  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Withstanding Voltage: 1000V AC/Minute  
 Insulator: PA66(UL94V-0), White  
 RoHS Compliant




△



△ 2 Pin

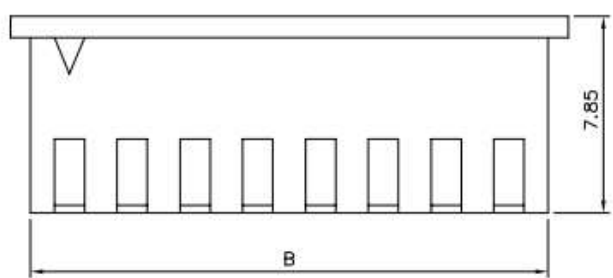

△



△ 3~20 Pin

| Pin | A     | B     |
|-----|-------|-------|
| 2   | 2.50  | 5.70  |
| 3   | 5.00  | 8.20  |
| 4   | 7.50  | 10.70 |
| 5   | 10.00 | 13.20 |
| 6   | 12.50 | 15.70 |
| 7   | 15.00 | 18.20 |
| 8   | 17.50 | 20.70 |
| 9   | 20.00 | 23.20 |
| 10  | 22.50 | 25.70 |
| 11  | 25.00 | 28.20 |
| 12  | 27.50 | 30.70 |
| 13  | 30.00 | 33.20 |
| 14  | 32.50 | 35.70 |
| 15  | 35.00 | 38.20 |
| 16  | 37.50 | 40.70 |
| 20  | 47.50 | 50.70 |

DRAWING No.  
**01572**

APPROVED BY  
MEI  
CHECKED BY  
HZF  
DRAWING BY  
QQJ

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
.X ±0.30 △  
.XX ±0.20

SCALE NONE REV. A2

UNIT mm

| NO.  | REV. | REVISIONS   | CHK   | DATE       |
|------|------|-------------|-------|------------|
| △ A2 |      | Modify Data | HZF   | 03/24/2010 |
| △ A1 |      | Modify Data | BECKY | 2004/11/19 |
| △ A0 |      | NEW RELEASE |       |            |