

SPECIFICATION

Current Rating: 3A AC,DC

Voltage Rating: 250V AC Max.




Operating Temperature: -25°C~+85°C

Insulation Resistance: 1000 Megaohms Min.

⚠ Contact Resistance: 20 Milliohms Max.

Material: PA66(UL94V-2)

RoHS Compliant

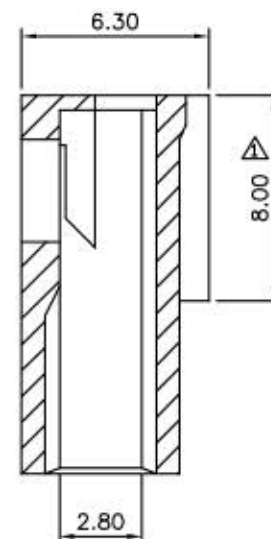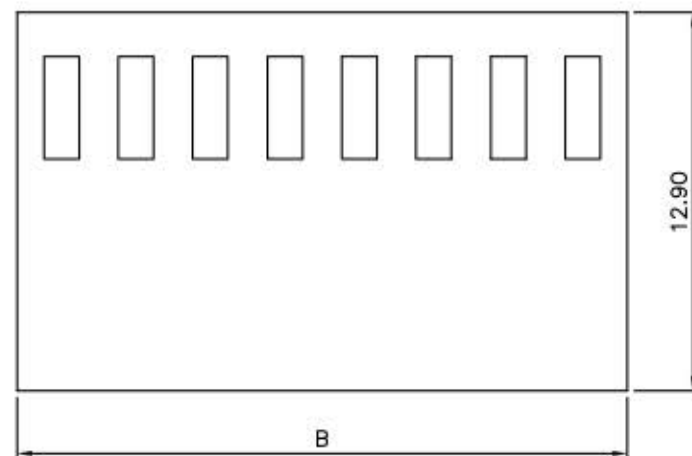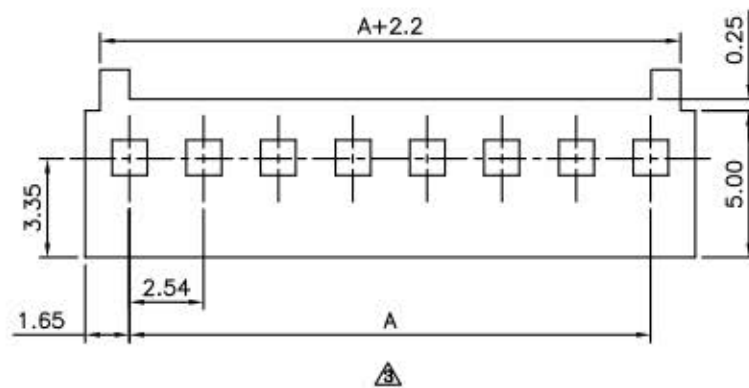

Pin	A	B
02	2.54	5.64
03	5.08	8.16
04	7.62	10.72
05	10.16	13.30
06	12.70	15.78
07	15.24	18.40
08	17.78	20.80
09	20.32	23.50
10	22.86	26.00
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	33.02	36.00
15	35.56	38.50
16	38.10	41.20
17	40.64	43.60
18	43.18	46.32
19	45.72	48.80
20	48.26	51.34

PART HUP پارت هاب

PH پارت هاب

از بازار آنلاین بخرید

DRAWING No.

01931

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.35
.XX ±0.25
ANG.

SCALE

NONE

REV.

B3

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

⚠ B3

Add Dim.

HZF

09/09/2011

⚠ B2

Modify SPEC.

HZF

12/26/2008

⚠ B1

ADD DIM 8.00

HZF

07/21/2008

⚠ B0

NEW RELEASE

BECKY

07/19/2005