


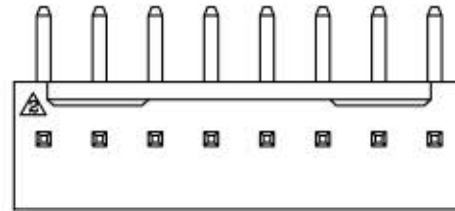


Recommended P.C.B. Layout


△△ SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:250V AC Max.
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-25°C~+85°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Contact:Brass,Tin Plated
 Insulator:PA66(UL94V-2)
 RoHS Compliant



2~5 Circuits

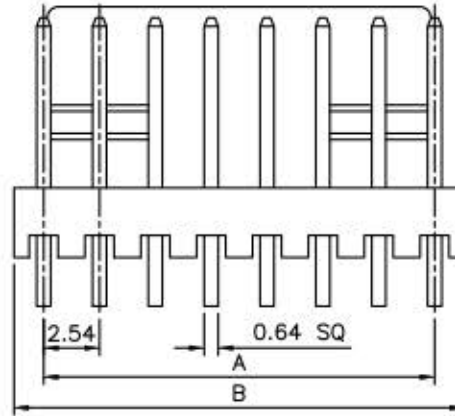

△△6~20 Circuits

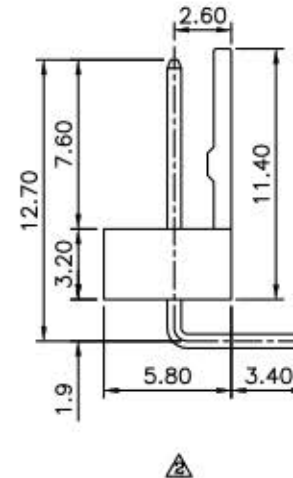

| Poles | A | B |
|-------|-------|-------|
| 2 | 2.54 | 5.12 |
| 3 | 5.08 | 7.66 |
| 4 | 7.62 | 10.20 |
| 5 | 10.16 | 12.74 |
| 6 | 12.70 | 15.30 |
| 7 | 15.24 | 17.94 |
| 8 | 17.78 | 20.48 |
| 9 | 20.32 | 23.02 |
| 10 | 22.86 | 25.58 |
| 11 | 25.40 | 28.12 |
| 12 | 27.94 | 30.68 |
| 13 | 30.48 | 33.10 |
| 14 | 33.02 | 35.80 |
| 15 | 35.56 | 38.34 |
| 16 | 38.10 | 40.94 |
| 17 | 40.64 | 43.30 |
| 18 | 43.18 | 45.90 |
| 19 | 45.72 | 48.56 |
| 20 | 48.26 | 50.80 |

پارت هاب **PART HUP** **پارتنرها**
 از بازار، آنلاین بخرید

DRAWING No.
20065

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.35
 .XX ±0.25
 ANG.

SCALE NONE

REV. A2

UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-------|------------|
| △ A2 | | Modify Data | HZF | 06/18/2010 |
| △ A1 | | Add Spec. | BECKY | 2004/03/05 |
| △ A0 | | NEW RELEASE | | |