


SPECIFICATION

Current Rating: 1 Amp Max.
 Dielectric Withstanding Voltage: 30V AC For 1 Minute
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max.
 Temperature Range: -55°C~+105°C
 Contact: Brass
 Shell: Cold Rolled Steel, Nickel Plated Over Copper
 Insulator: PBT(UL94V-0), Black
 RoHS Compliant

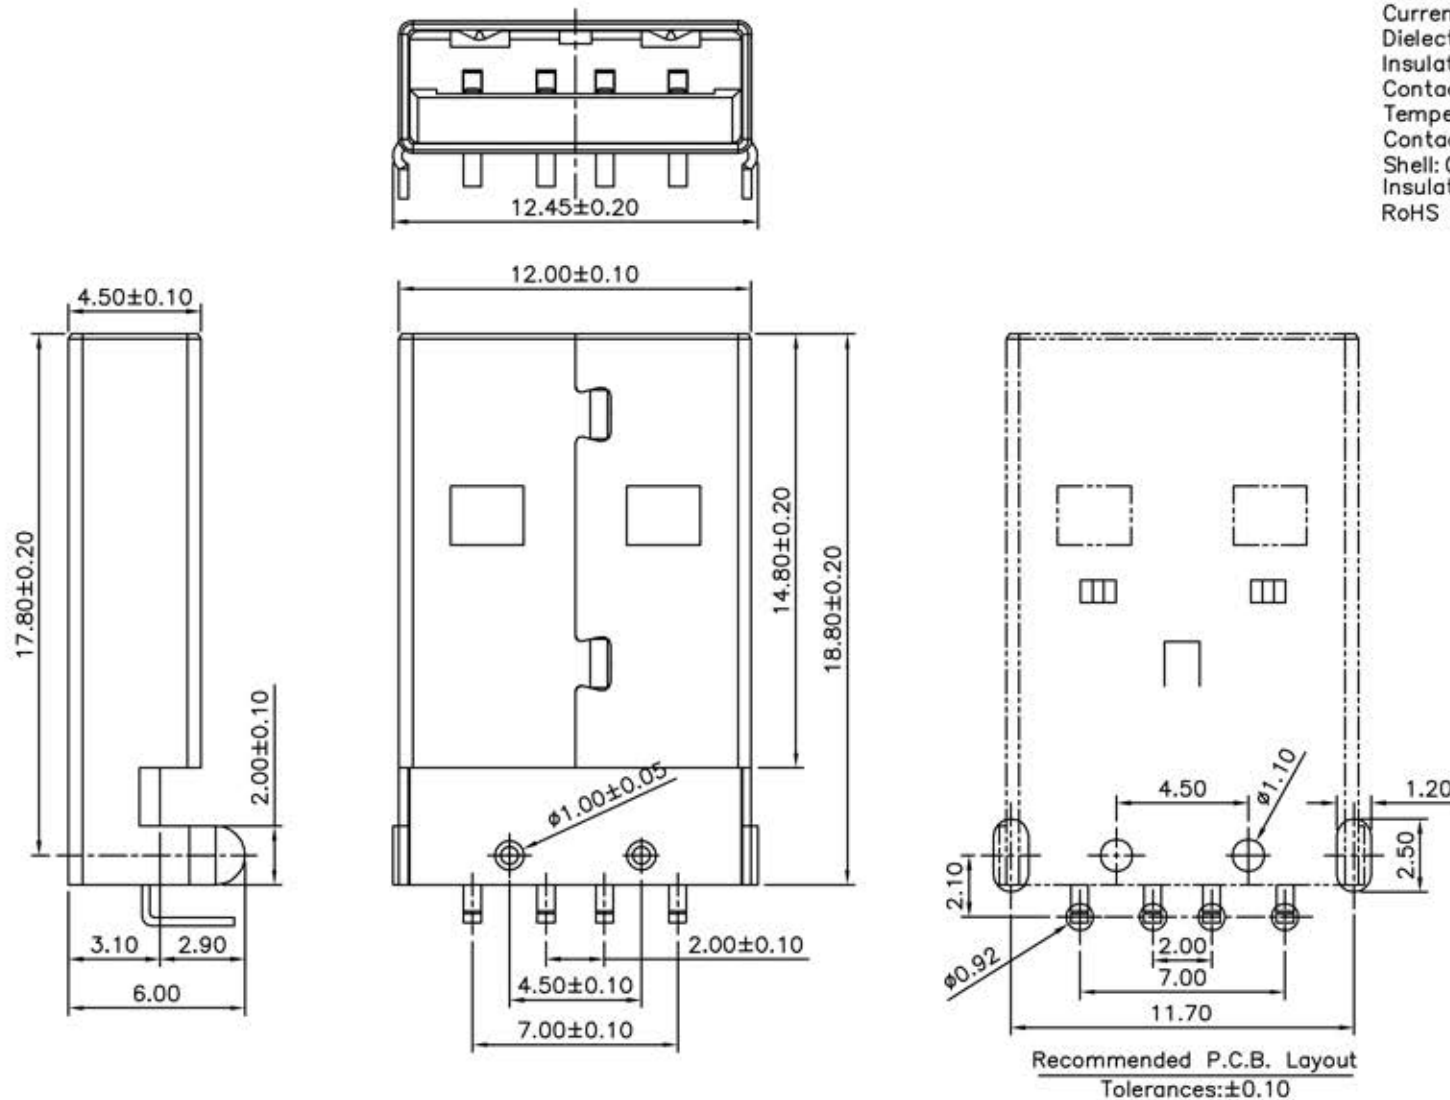

پارت هاب **PART HUP** **پارتهاب**
 از بازار، آنلاین بخرید

DRAWING No.

10018

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

SCALE


NONE

REV.

BO

UNIT

mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

HZF 09/22/2010