


**△ SPECIFICATION**

Current Rating: 1A Max.  
 Dielectric Withstanding Voltage: 30V AC For 1 Minute  
 Insulation Resistance: 1000 Megaohms Min. At DC 500V  
 Contact Resistance: 30 Milliohms Max.  
 Temperature Range: -55°C~+105°C  
 Housing: PA6T(UL94V-0), White  
 Contact: Brass, Gold Plated On Contact Area, Tin Plated On Solder Tail, Under Nickel  
 Shell: Cold Rolled Steel, Nickel Plated Over Copper  
 RoHS Compliant

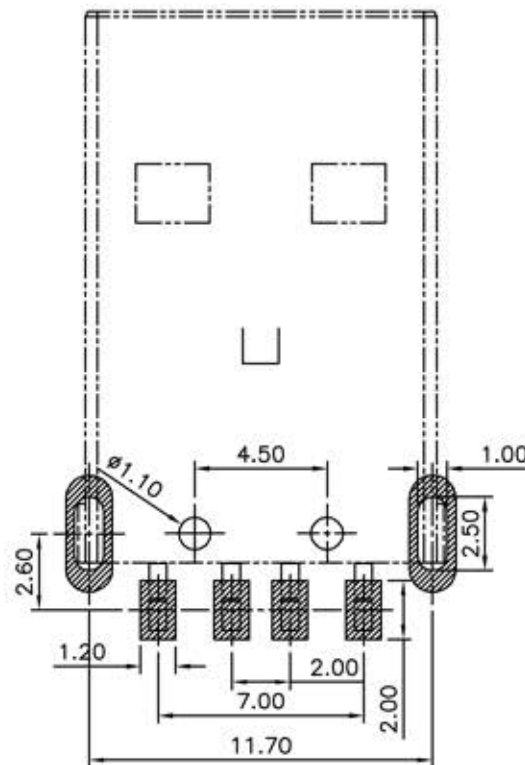

**△ Recommended P.C.B. Layout**  
 (PCB Board Tolerance ±0.10)

پارت هاب PART HUP



از بازار، آنلاین بخرید

Telegram:  
09396994470

APPROVED BY

MEI

CHECKED BY

HZ

DRAWING BY

WZL

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.30  
 △ .XX ±0.20  
 △ .XXX ±0.10  
 ANG. ±1°

△ A4

Modify Data

HZF

09/23/2010

△ A3

Modify Data

HZF

06/12/2009

△ A2

Modify Part No.

INGRID

10/01/2007

△ A1

Add Dim.

BECKY

01/20/2006

△ A0

NEW RELEASE

MEI

10/10/2001

SCALE


NONE

REV.

A4

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE