

SPECIFICATIONS

Current Rating: 1A Max.

Dielectric Withstanding Voltage: 500V(AC) For 1 Minute

Contact Resistance: 30 Milliohms Max.

Insulation Resistance: 1000 Megohms Min. At DC 500V

Total Mating Force: 4.0Kgf Max.






Total Unmating Force: 1.0Kgf Min.

Temperature Range: -55°C~+105°C

Insulator: PBT, UL 94V-0

Contact: Copper Alloy, t=0.20mm, Gold Flash

Shell: Cold Rolled Steel, t=0.30mm, Nickel Plated

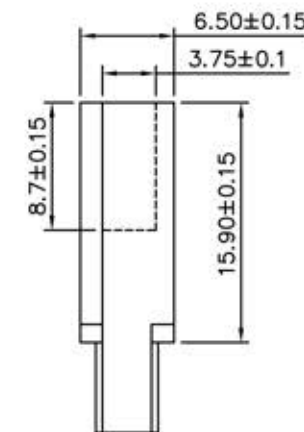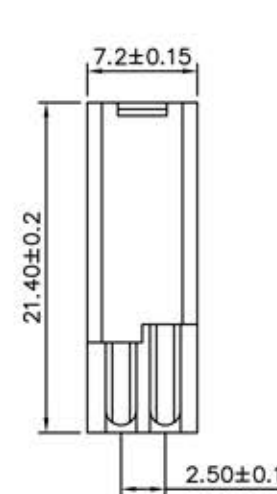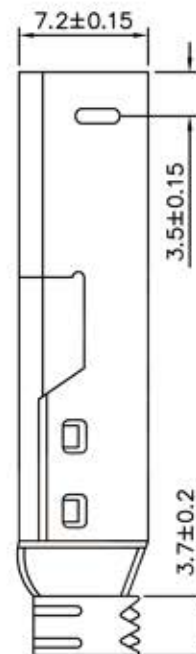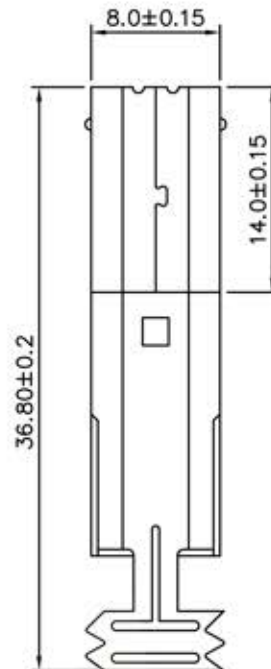

Telegram:
09396994470

پارت هاب PART HUP

پارتهاب PH

از بازار، آنلاین بخرید

DRAWING No.

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.3
.XX ±0.20
.XXX ±0.100
ANG. ±1°

SCALE

NONE

REV.

A1

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

BECKY

06/07/2005

A0

NEW RELEASE

RAN