
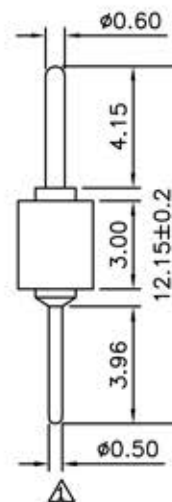
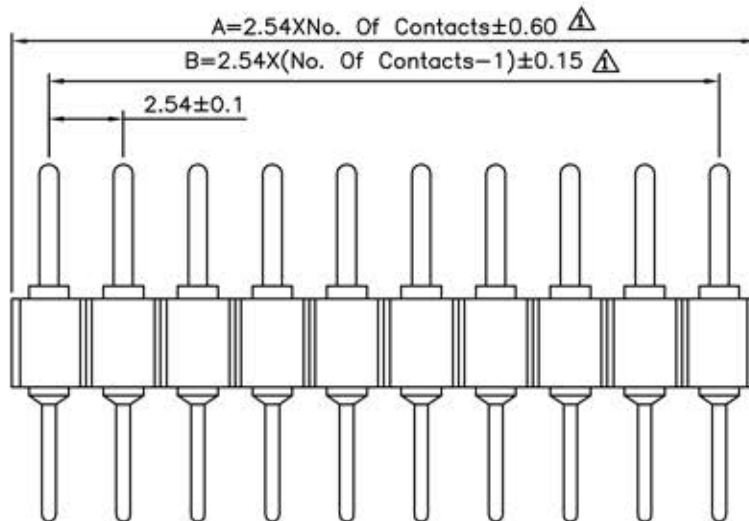


△ Recommended P.C.B. Layout

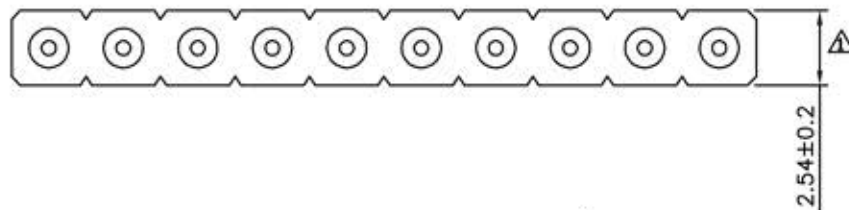

△ SPECIFICATION

Current Rating:3.0 Amp
Voltage Rating:100V AC/DC
Withstanding Voltage:1000V AC For 1 Minute
Contact Resistance:10 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Operation Temperature Range:-40°C~+105°C
Insulator:PPS(UL94V-0),Black
Contact:Brass,Tin Plated
RoHS Compliant

△ Pin	A	B	Pin	A	B
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	71.12	68.58
9	22.86	20.32	29	73.66	71.12
10	25.40	22.86	30	76.20	73.66
11	27.94	25.40	31	78.74	76.20
12	30.48	27.94	32	81.28	78.74
13	33.02	30.48	33	83.82	81.28
14	35.56	33.02	34	86.36	83.82
15	38.10	35.56	35	88.90	86.36
16	40.64	38.10	36	91.44	88.90
17	43.18	40.64	37	93.98	91.44
18	45.72	43.18	38	96.52	93.98
19	48.26	45.72	39	99.06	96.52
20	50.80	48.26	40	101.60	99.06
21	53.34	50.80			

پارت هاب PART HUP
از بازار، آنلاین بخرید

PH
پارتهاب

DRAWING No.

16683

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WSS

SCALE

NONE

REV.

A1


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ .X ±0.20

.XX ±0.15

UNIT

mm



△ A1

Modify Data

HZF

07/27/2011

△ A0

NEW RELEASE

RAN

NO.REV.

REVISIONS

CHK

DATE